



FUJIKURA COMPOSITES

“RR-KA” series

Clean room

Air relay regulators for clean room, and servo-balanced system comprising rolling diaphragm and measuring capsule provides exceptionally precise pressure control.

■ Features

- The parts are made of stainless materials and fluoric rubber, and the other parts are all electroless nickel plated so that very little dust is caused.
- Manifold pipe fitting is available.
- Exhaust relief air and bleed air out of clean room is available to exhaust by connecting exhaust pipe to relief port and bleed port.
- Highly accurate pressure control with sensitivity 0.1%F.S. repeatability $\pm 0.1\%$ F.S.





■ Specification

Model name		RR-8-□-KA
Working fluid		Clean compressed air
Set pressure range	MPa[psi]	0.014 ~ 0.84 [2.0 ~ 122]
Supply pressure range	MPa[psi]	1 [145] Max
Relief function		Incorporated
Repeatability	% F.S.	Less than ± 0.1
Sensitivity	% F.S.	Within 0.1
Air consumption	ℓ /min(ANR) [scfm]	Within 3.7 [0.13]
Operating temperature	$^{\circ}\text{C}$ [$^{\circ}\text{F}$]	5 ~ 60 [41 ~ 140]
Pipe port	Rc	$\frac{1}{4}$, Manifold
Gauge port	Rc	$\frac{1}{4}$
Bracket		Standard equipment (excluding manifold)
Weight	kg[pound]	0.75 [1.65]




FUJIKURA COMPOSITES

■ Characteristic

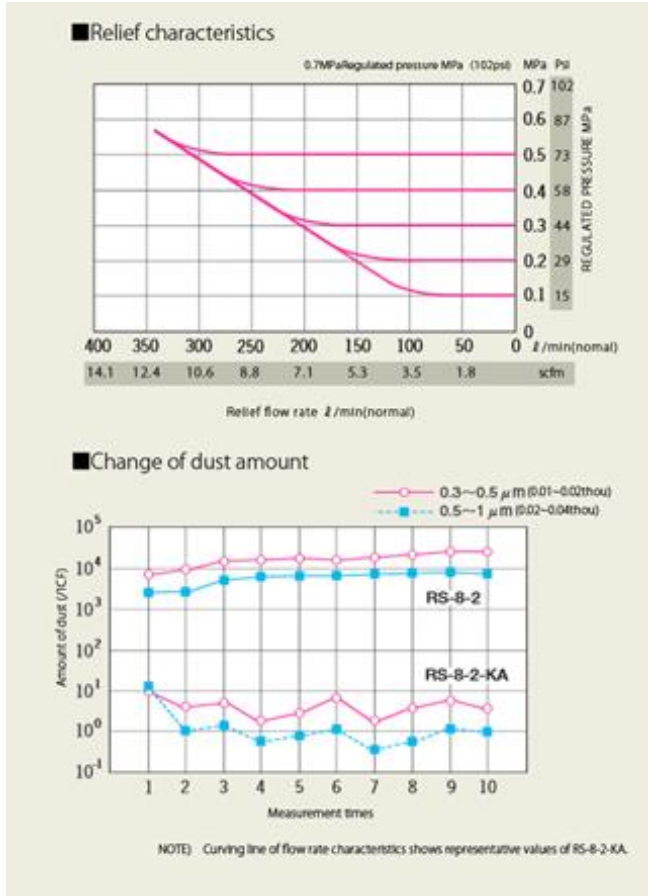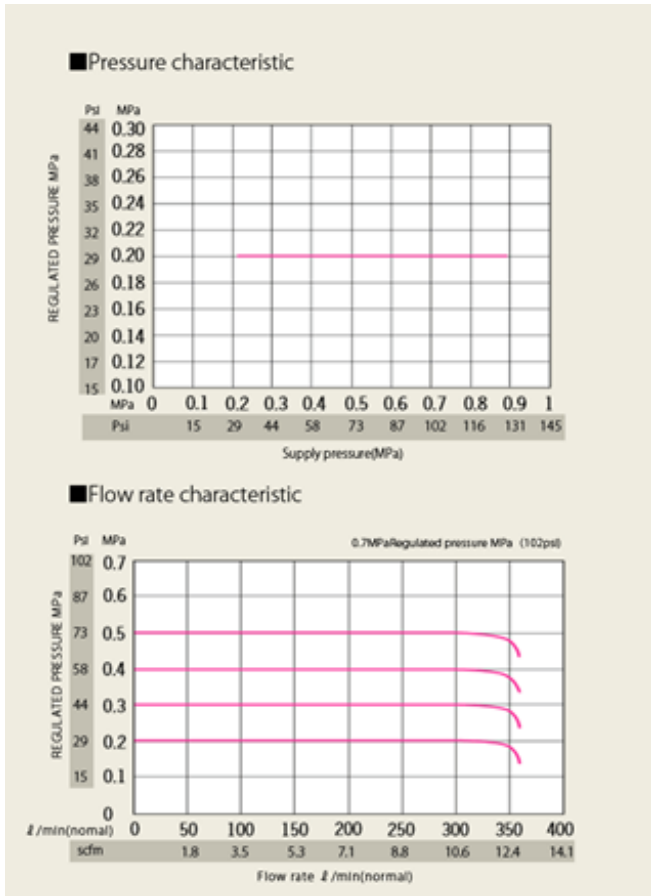

■ Model designation

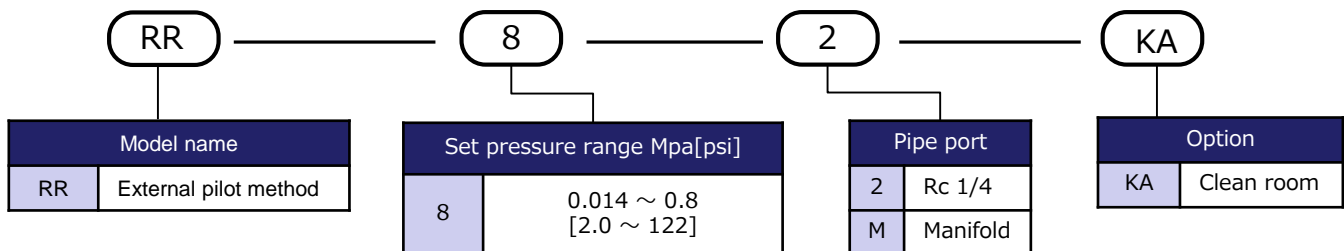


■ Applications

- "RR-KA series" is ideal for precision pressure control in clean room.




FUJIKURA COMPOSITES

■ Size

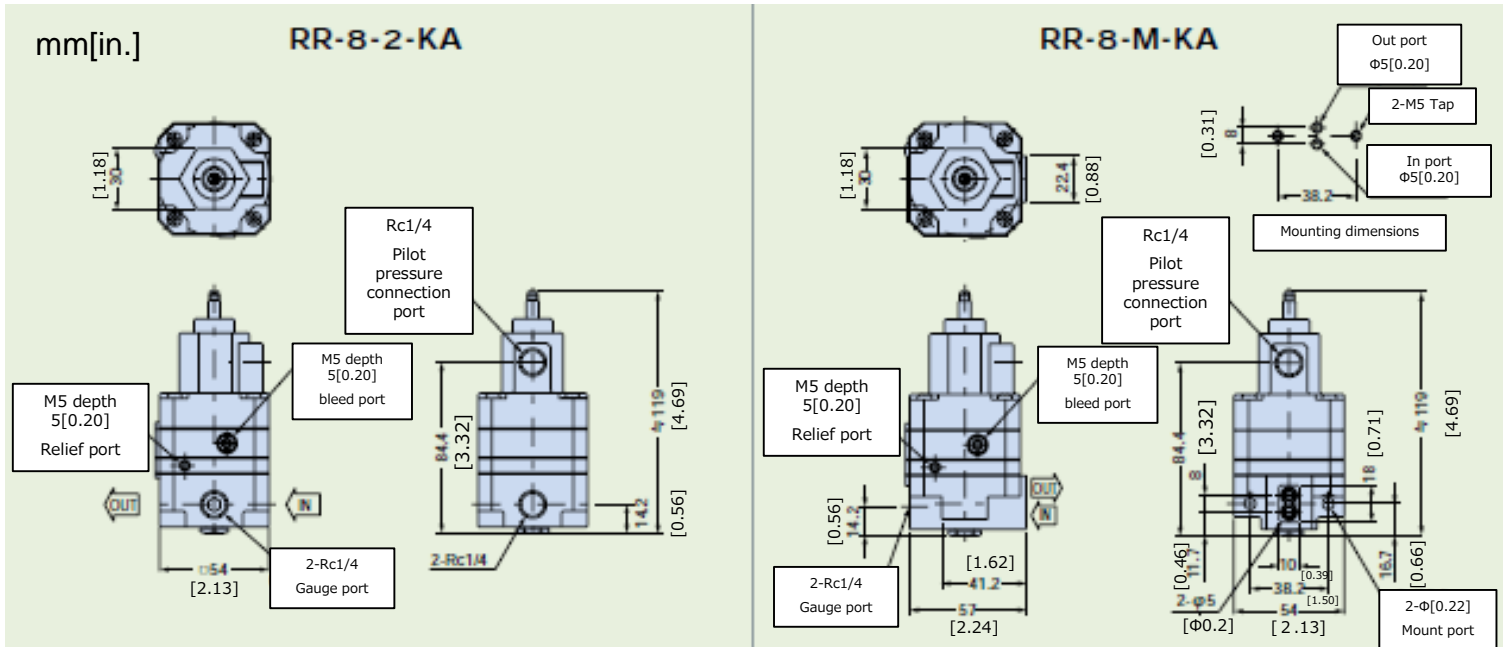

■ JIS code

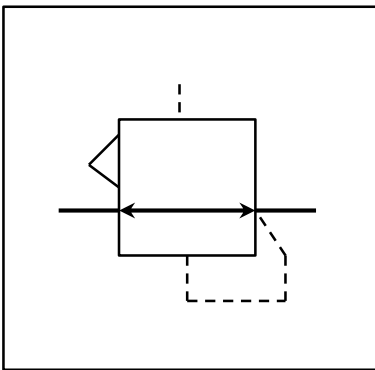

**FUJIKURA
COMPOSITES**

Contact us

Control Equipment
 Head office: TOC Ariake East Tower 10F, 3-5-7 Ariake,
 Koto-ku, Tokyo, Japan 135-0063
 TEL +81-3-3527-8573
 E-mail: seigyotoiawase.en@fc.fujikura.co.jp
 URL: <http://www.fujikura-control.com/>